

**LA1186N**


FM Front End for Radio-Cassette Recorders, Music Centers

Features and Functions

- Contains RF amplifier, MIX, OSC, AFC diode.
- Operating voltage : 1.8 to 8.0V.
- Improvement in cross modulation characteristic due to the use of double-balanced MIX.
- Improvement in strong input characteristic.
- Minimum number of external parts required.
- Less spurious radiation from local OSC.
- TV (1 to 12 channel) receive capability.

Package Dimensions

unit: mm

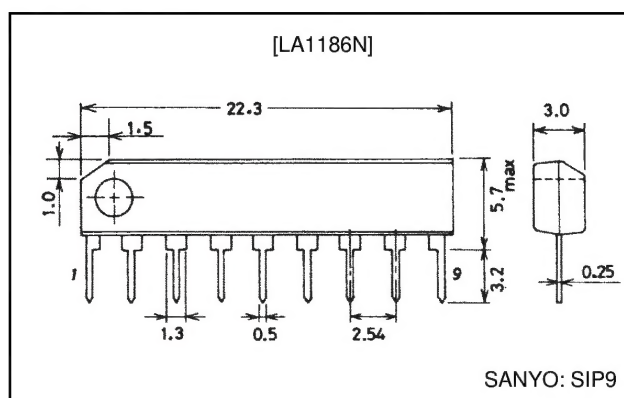3017C-SIP9**Specifications****Maximum Ratings** at $T_a=25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CC} max		8.0	V
Maximum pin voltage	V3-5		12	V
	V6-5		$V_{CC}+0.8$	V
Allowable power dissipation	P_d max	$T_a \leq 80^\circ\text{C}$	150	mW
Operating temperature	T_{opr}		-20 to $+80$	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to $+125$	$^\circ\text{C}$









Operating Conditions at $T_a=25^\circ\text{C}$




Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{CC}		4.5	V
Operating voltage range	V_{CC} op		1.8 to 7.5	V

Electrical Characteristics at $T_a=25^\circ\text{C}$, $V_{CC}=4.5\text{V}$, $f_I=108\text{MHz}$, $f_{OSC}=118.7\text{MHz}$, See specified Test Circuit.


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current dissipation	I_{CC}	Quiescent		7.0	9.5	mA
Output saturation voltage	V_o	$V_{IN}=100\text{dB}\mu$	95	115	135	V
Local OSC voltage	V_{OSC}	$V_{CC}=2\text{V}$	200	315		mVrms
Oscillation stop voltage				1.4	1.8	V

LA1186N

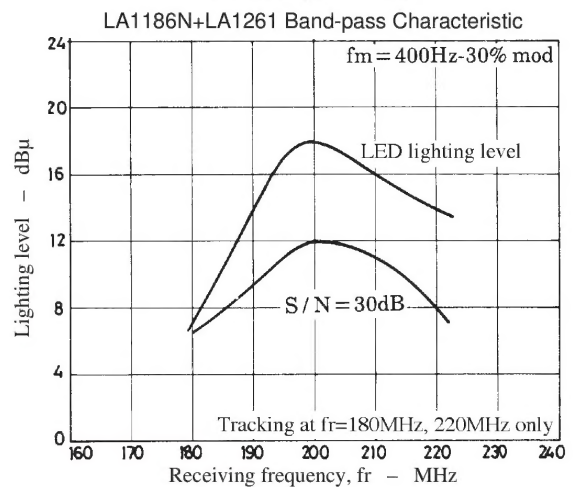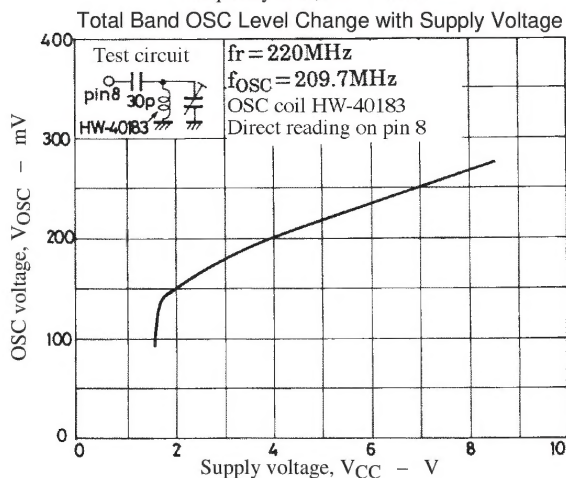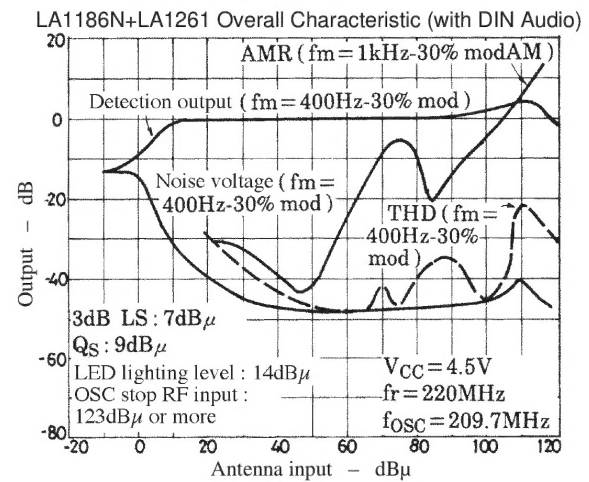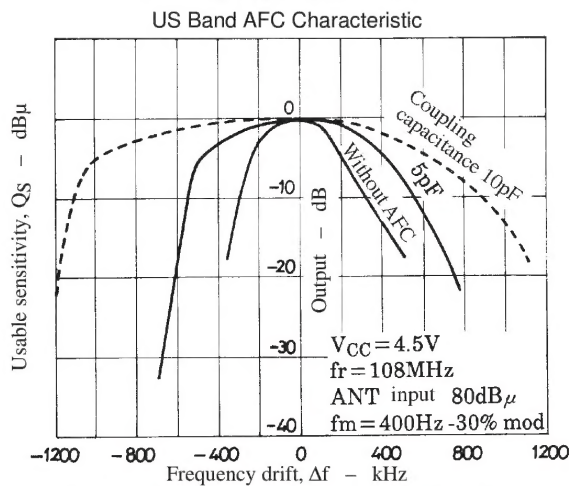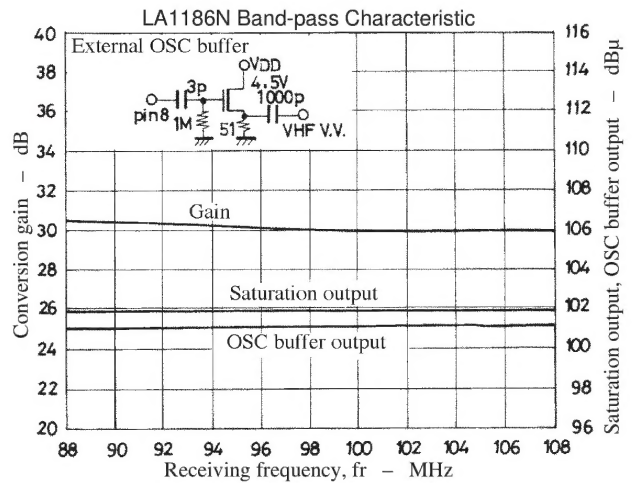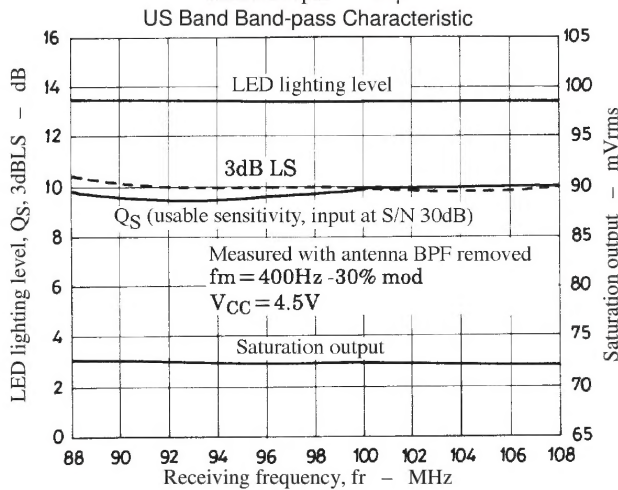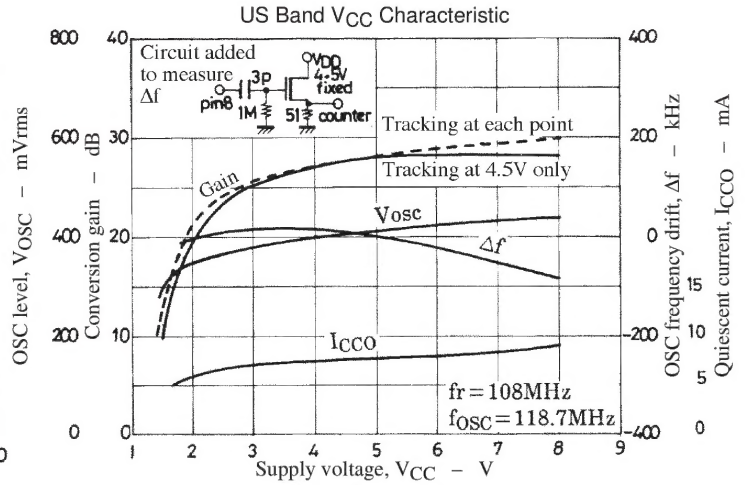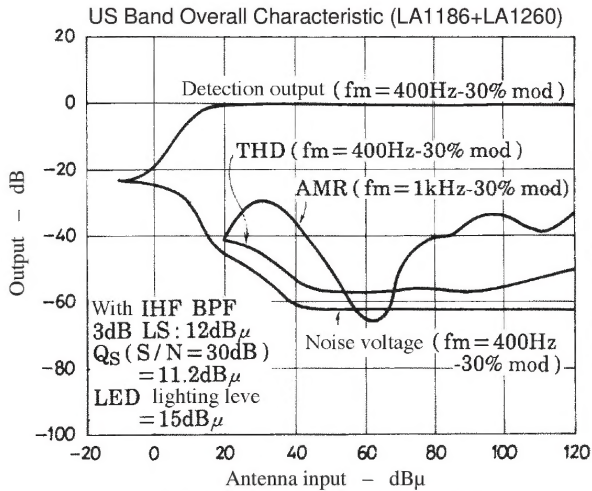

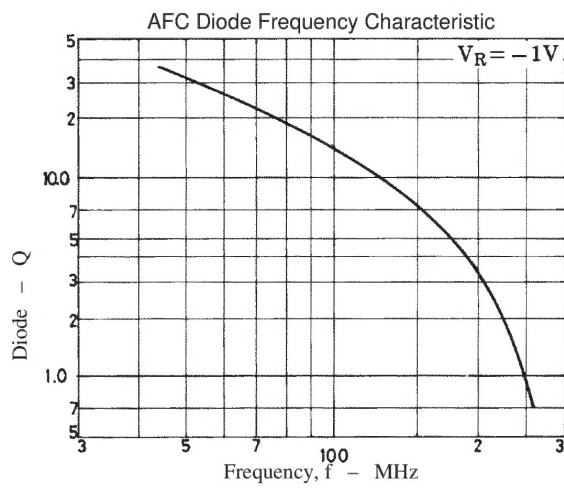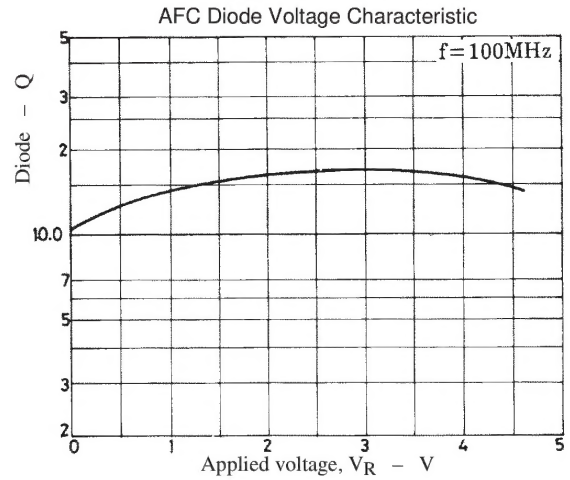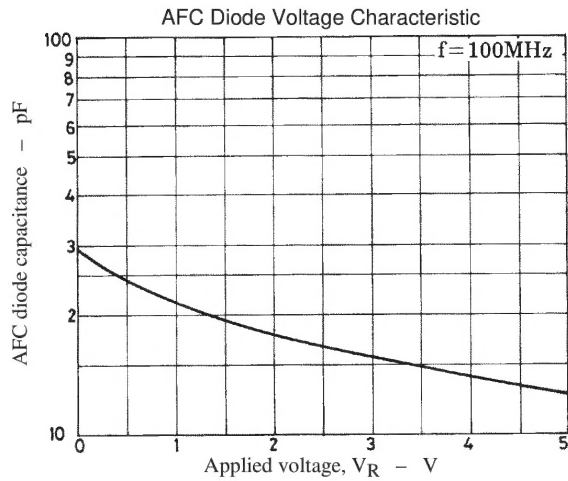


US Band Test Circuit

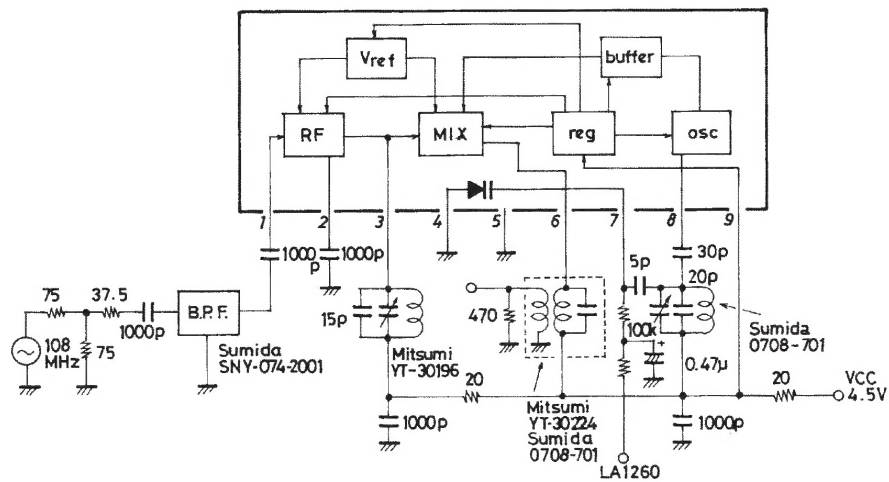

Unit (resistance : Ω , capacitance : F)



Sample Application Circuit for TV Band

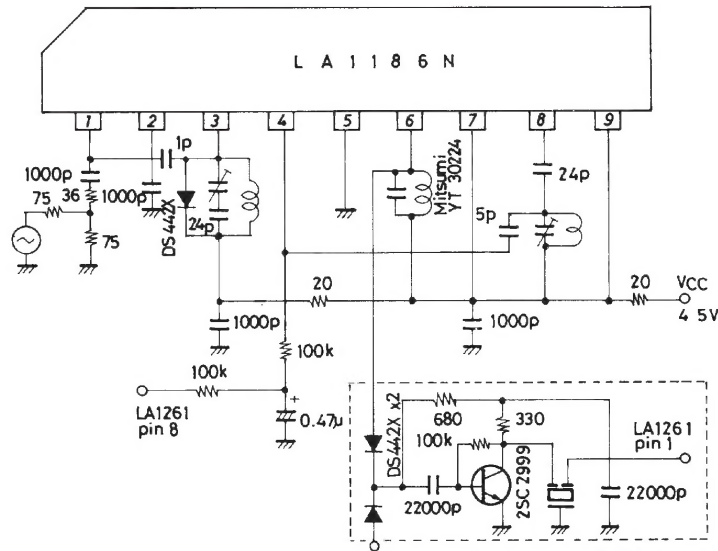


FM band LA1186 MIX output

TV band (4 to 12ch),
FM band (FM + TV1 to 3ch)
Select circuit


Unit (resistance : Ω , capacitance : F)

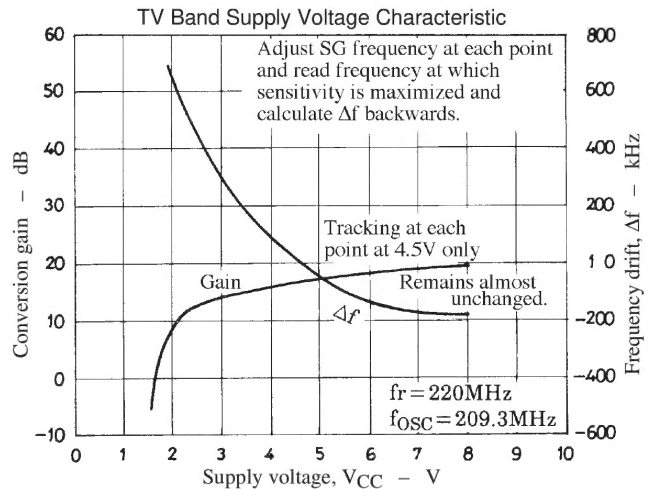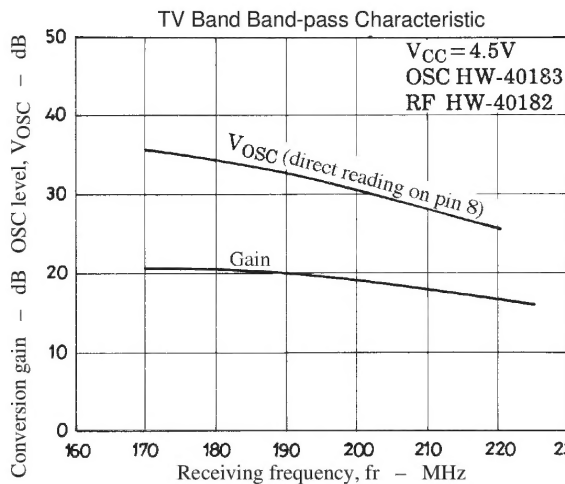

LA1186N Temperature Characteristic Test Circuit

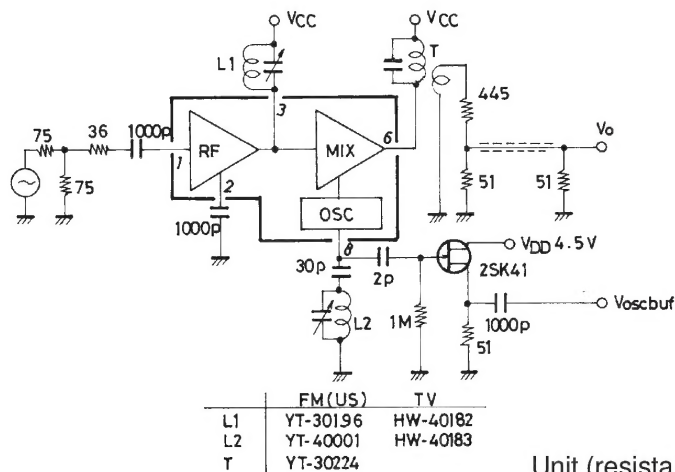

Unit (resistance : Ω , capacitance : F)

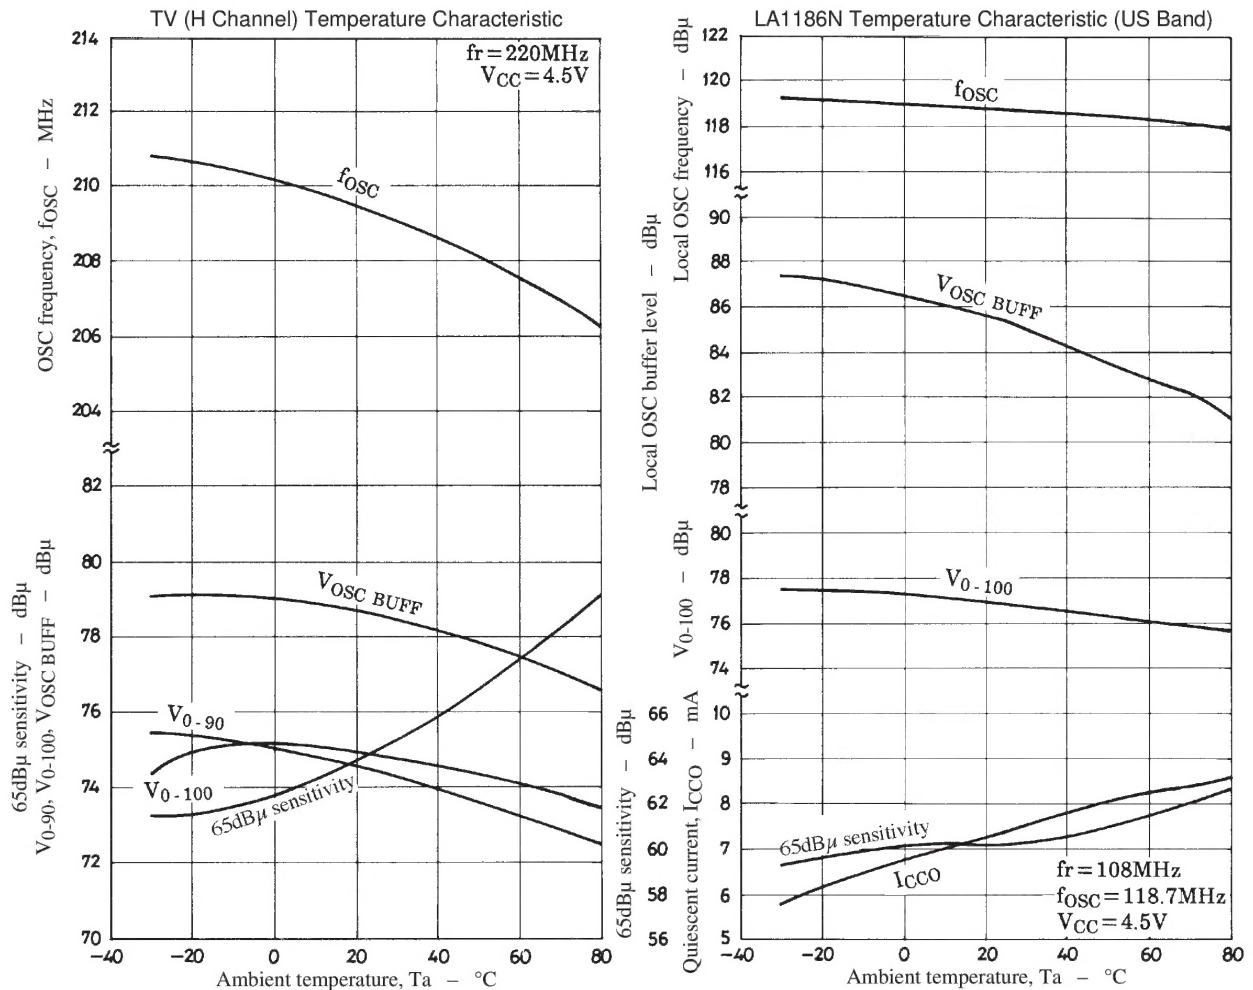

(Note) 65dB μ sensitivity : Input at 65 dB μ in Temperature Characteristic Test Circuit

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of October, 1997. Specifications and information herein are subject to change without notice.